

Tiandy



TC-R3840 Spec: I/B/N/V4.0 H.265 8HDD 40ch NVR

Pro Series



KEY FEATURES

HD Input

- S+265/H.265/H.264 video formats
- Connectable to the third-party network cameras
- Support live view, storage, and playback of the connected camera at up to 12MP resolution

HD Output

- HDMI and VGA independent outputs
- HDMI Video output at up to 4K resolution

HD Storage

- 8 SATA interface, up to 10TB for 1 HDD
- S+265 compression effectively reduces the storage space and costs by up to 75%

HD Transmission

- 2×RJ45 self-adaptive 10/100/1000 Mbps network interface

Various Applications

- Centralized management of IP cameras, including configuration, information import/export, real-time information display, upgrade, etc.
- Connectable to smart IP cameras from Tiandy and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Web6 supports plug-in free browsing and can preview videos on all browsers
- Support cloud upgrade



SPECIFICATIONS

Input			
Video Input	40-channel		
Max Resolution	12MP		
Two-way Audio Input	1-ch, 3.5mm		
Bandwidth	Income 640Mbps; Outgoing 320Mbps		
Output			
HDMI/VGA Output	HDMI 2-ch, 3840x2160, 1920×1080, 1280×720, 1024×768, 1366×768, 1440×900, 1280×800 VGA 2-ch, 1920×1080, 1280×720, 1024×768, 1366×768, 1440×900, 1280×800		
Screen Split	1/2/3/4/5/6/7/8/9/10/12/13/16/20A/20B/25/32/36/40		
Audio Output	1×3.5mm, 1×BNC		
Decoding			
Decoding Format	S+265/H.265/H.264	Audio Compression	G.711A / G.711U /ADPCM/AAC
Recording Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
Preview Capability	16MPx3, 4×12MP, 6×8MP, 8×6MP, 9×5MP, 12×4MP, 16×3MP, 24×1080P, 48×720P, 80×4CIF		
Synchronous Playback	16MPx3, 4×12MP, 6×8MP, 8×6MP, 9×5MP, 12×4MP, 16×3MP, 16×1080P, 16×720P		
Records Encryption	Yes		
Hard Disk			
SATA	8 SATA interface for 8 HDDs		
Capacity	Up to 10TB for each HDD		
eSATA Interface	1 eSATA interface		
Array Type	JBOD, RAID 0/1/5/6/10		
External Interface			
Network Interface	2×RJ45 self-adaptive 10/100/1000 Mbps network interface		
USB Interface	2×USB 2.0, 1×USB 3.0		
Serial Interface	2×RS485, 1×RS232		
Alarm In/Out	16/4		
Network			
Protocol	HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, DHCP, DNS, DDNS, EasyDDNS, NTP, SMTP, SSL, QoS, IPv4, IPv6, IP Filter, PPPOE, SSH, RTSP, RTP, RTCP, ARP, NAS(NFS、SMB/CIFS), Unicast, MULTICAST		
System Compatibility	ONVIF (PROFILE S/T/G), SDK, P2P		
General			
Web Version	Web6		
Language	Simplified Chinese, Traditional Chinese, English, Spanish, Italian, Korean, Turkish, Russian, Thai, French, Hebrew, Polish, Dutch, Arabic, Vietnamese, German, Ukrainian, Portuguese		
Operating Conditions	-10~55℃, 10%~90% RH		
Power Supply	AC100~240V, 50/60HZ		
Redundant Power	N/A		
Consumption (without HDD)	<18W(HDD not included, idling)		
Chassis	2U		
Dimensions	94×440×460 mm (3.7×17.32×18.11 inch)		
Weight (without HDD)	7.2Kg (15.87lb)		

Certificate


CE, EMC and Protection standards
EN 55032:2015/A11:2020, EN 55035:2017/A11:2020 EN IEC 61000-3-2:2019/A1:2021,
EN 61000-3-3:2013/A1:2019 EN 50130-4:2011/A1:2014 IEC 61000-4-2:2008,
IEC 61000-4-3:2020, IEC 61000-4-4:2012 IEC 61000-4-5:2014+AMD1:2017
IEC 61000-4-6:2013, IEC 61000-4-8:2009, IEC 61000-4-11:2020

Tiandy


AVAILABLE MODEL

TC-R3840 SPEC: I/B/N/V4.0

DIMENSIONS (Unit: mm)

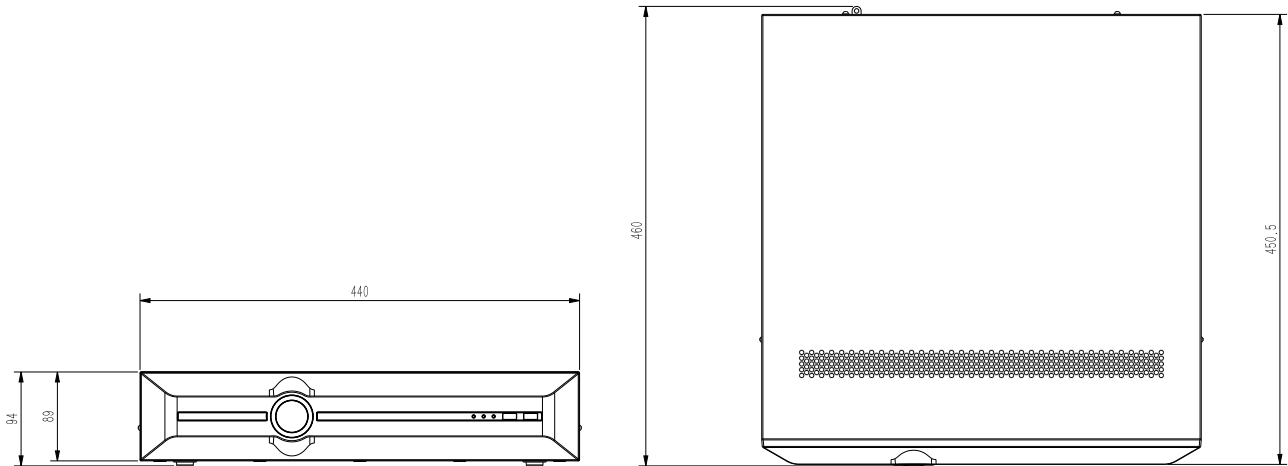

Physical Interfaces

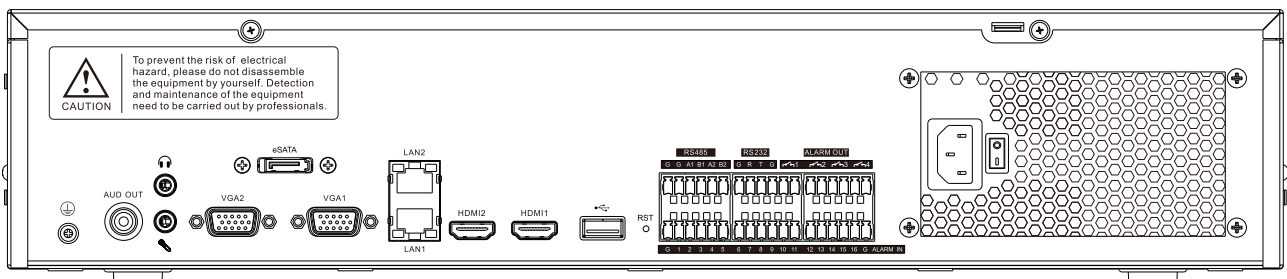

DISTRIBUTED BY



Tiandy Technologies Co., Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048