


How to Add Devices into Easy7 Smart Client Express

Description: This document will show you 5 ways to add devices into Easy7 Smart Client Express.

Prerequisites: Easy7 Smart Client Express


Section 1: Add by IP Way.

- 1.1 Custom device name.
- 1.2 Enter device's IP address.
- 1.3 Enter device's account and password.

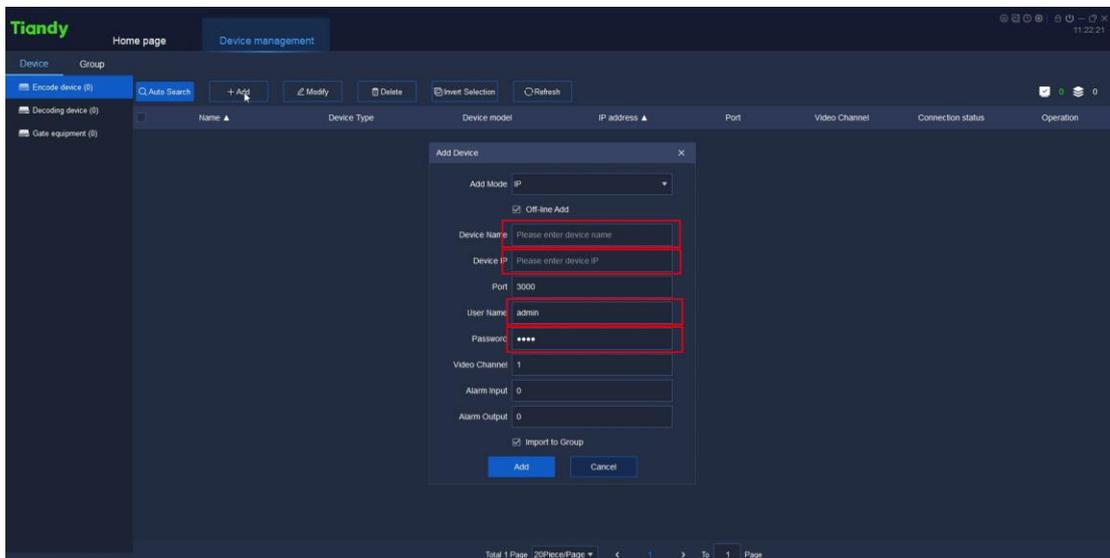

Section 2: Add by Standard Domain Name Way

- 2.1 Custom device name.
- 2.2 Enter the DNS
- 2.3 Enter device's account and password.

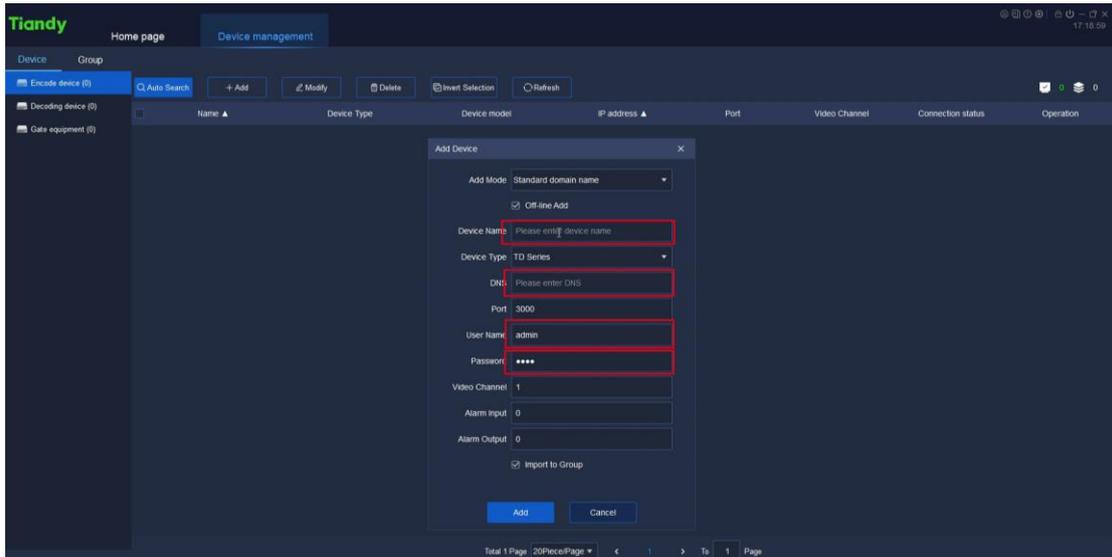


Section 3: Add by Easyddns Way

- 3.1 Custom device name.
- 3.2 Enter the DNS
- 3.3 Enter device's data port.
- 3.4 Enter the DNS's account and password.
- 3.5 Enter device's account and password.

Notify:

1. The DNS's account and password is QQ and QQQQ;
2. The DNS domain is www.easyddns.tech/xxx, and we just need to enter xxx in DNS box.

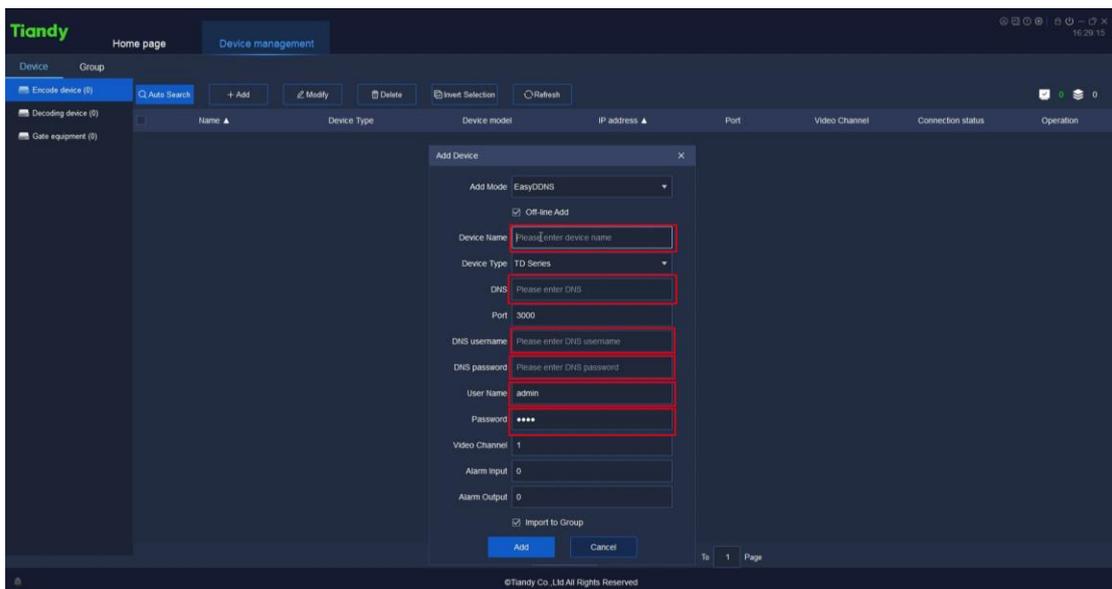


Section 4: Add by P2P Direct Connection Way

4.1 Custom device name.

4.2 Enter the device ID.

4.3 Enter device's account and password.

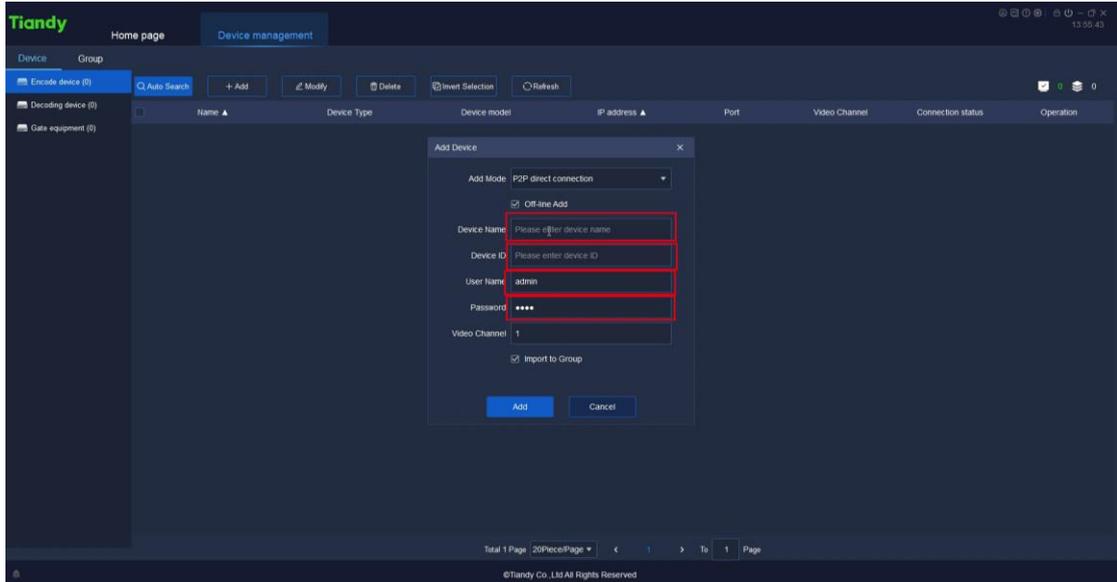


Section 5: Add by P2P Account Way

5.1 Click P2P Setting in System configuration

5.2 Select the device region and enter the APP's account and password.

5.3 Choose P2P Account way and select the devices which want to add.

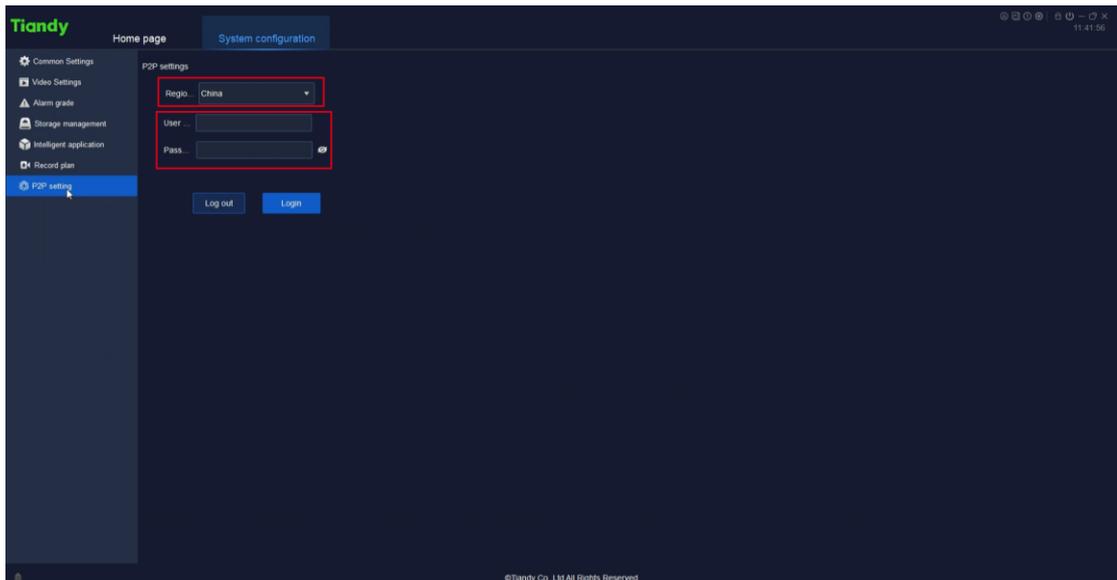

The screenshot displays the 'Device management' section of the Tiandy web interface. A table lists device information, and an 'Add Device' modal is active. The modal contains a table with the following data:

Name	Channel N	Stat
fisheye	1	Off
test	1	Unkn

The 'test' row is highlighted with a red box. The modal also features an 'Add Mode' dropdown menu set to 'PPPoE account' and 'Add' and 'Cancel' buttons at the bottom.

Total: 1 Page, 20 Piece/Page. < 1 > To 1 Page

©Tiandy Co., Ltd. All Rights Reserved